

NEXIS

SW941

4x1 HDMI 2.0 UHD Switcher with HDCP 2.2



HDMI[®]
HIGH-DEFINITION MULTIMEDIA INTERFACE

4k x 2k⁺

HDCP 2.2

Operation Manual

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. responsibility for any infringements of patents or other rights of third parties which may result from its use.

NEXIS assumes no responsibility for any inaccuracies that may be contained in this document. NEXIS also makes no commitment to update or to keep current the information contained in this document.

NEXIS reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from NEXIS

© Copyright 2016 by NEXIS

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.



SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE (DD/MM/YY)	SUMMARY OF CHANGE
RDV1	03/10/16	Preliminary Release





CONTENTS

- 1. Introduction..... 1**
- 2. Applications..... 1**
- 3. Package Contents 1**
- 4. System Requirements..... 2**
- 5. Features 2**
- 6. Operation Controls and Functions..... 3**
 - 6.1 Transmitter Front Panel 3
 - 6.2 Transmitter Rear Panel..... 4
 - 6.3 Remote Control..... 5
 - 6.4 IR Pin Definitions..... 5
 - 6.5 RS-232 Protocols 6
 - 6.6 RS-232 Commands..... 7
 - 6.7 Factory Default settings..... 8
- 7. Connection Diagram 9**
- 8. Specifications 10**
- 9. Timing 11**



1. INTRODUCTION

This 4 by 1 4K UHD HDMI Switcher is a brand new high performance design for the next generation of audio/video equipment. It allows a single HDMI output to switch between 4 HDMI sources. This unit provides a high level of audio and video performance with support for resolutions up to 4K@60Hz and high definition digital audio formats such as LPCM 7.1 (with sampling rates up to 192kHz), Bitstream pass-through. The included auto switching functionality allows for the possibility of hands-free, user friendly, operation. Control is provided via front panel buttons, IR remote, RS-232.

2. APPLICATIONS

- Demo Room Displays
- Hotel Lobby Information Displays
- Showrooms and Demo Rooms
- Public Commercial Displays
- Home Theaters

3. PACKAGE CONTENTS

- 4 by 1 HDMI Switcher
- 5V/2.6A DC Power Adaptor
- Rack ear set
- Operation Manual
- IR Extender (optional)
- IR Remote control (battery included) (optional)

4. SYSTEM REQUIREMENTS


- HDMI source equipment such as media players, video game consoles or set-top boxes.
- HDMI receiving equipment such as HDTVs, monitors or audio amplifiers.
- The use of "Premium High Speed HDMI" cables is highly recommended.

5. FEATURES

- HDMI 2.0 and DVI 1.0 compliant
- HDCP 2.2 compliant
- 4 HDMI inputs and 1 HDMI output
- 3D signal support (with 3D source and compatible 3D TV)
Supports 4K UHD resolutions up to 4096x2160@60Hz (YUV 4:4:4, 8-bit)
Pass-through of high definition audio including LPCM up to 7.1, and Bitstream
- CEC pass-through
- Support Internal/External EDID management


6. OPERATION CONTROLS AND FUNCTIONS

6.1 Transmitter Front Panel

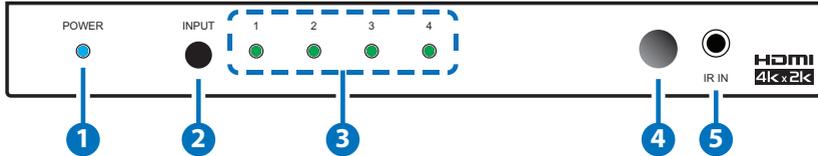

- 1 POWER LED:** This LED will illuminate to indicate the unit is on and receiving power.
- 2 INPUT:** Press this button to sequentially switch through the available inputs. Long press input key until LED start to flicking, then release the input key will execute factory default.
- 3 1~4:** The illuminated LED indicates which source is currently selected.
- 4 IR Window:** Accepts IR signals from the included IR remote for control of this unit only.
- 5 IR IN:** Connect to the provided IR Extender to extend the IR control range of the unit. Ensure that the remote being used is within direct line-of-sight of the IR Extender.


6.2 Transmitter Rear Panel

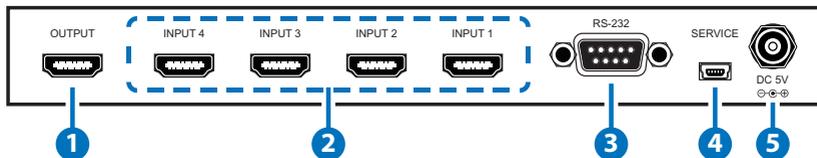


- 1 OUTPUT:** Connect to HDMI TVs, monitors or amplifiers for digital video and audio output.
- 2 INPUT 1~4:** Connect to HDMI source equipment such as media players, game consoles or set-top boxes.
- 3 RS-232:** Connect directly to your PC/laptop to send RS-232 commands to control the unit.
- 4 SERVICE:** This slot is reserved for firmware update use only.
- 5 DC 5V:** Plug the 5V DC power adapter into the unit and connect it to an AC wall outlet for power.

6.3 Remote Control

- 1 POWER:** No function
- 2 INPUT 1~4:** Press any of these buttons to switch to the corresponding input.

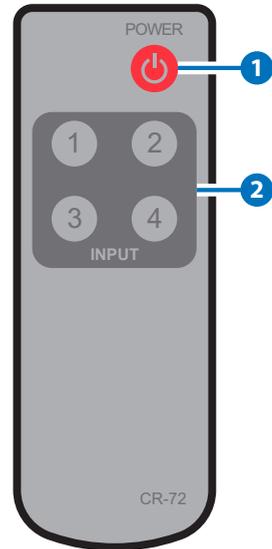

6.4 IR Pin Definitions

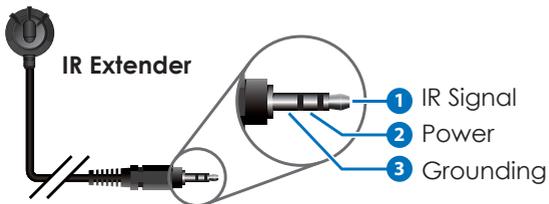

6.5 RS-232 Protocols

MATRIX	
PIN	Definition
1	NC
2	Tx
3	Rx
4	NC
5	GND
6	NC
7	NC
8	NC
9	NC



REMOTE CONTROLLER	
PIN	Definition
1	NC
2	Rx
3	Tx
4	NC
5	GND
6	NC
7	NC
8	NC
9	NC



Baud Rate: 115200bps

Data bit: 8 bits

Parity: None

Flow Control: None

Stop Bit: 1

6.6 RS-232 Commands


Command Name	Description	Parameters
OUT N	SET/SHOW CURRENT INPUT SELECTION	OUT N, N=1~4 (INPUT), N=0 (MUTE), N=? (STATUS)
SOURCEDET	SHOW INPUT INFORMATION	NONE
SINKINFO	SHOW SINK INFORMATION	NONE
HDCPIN N1 N2	SET/SHOW INPUT HDCP STATUS	HDCPIN N1 N2, N1=1~4 (INPUT), N2=1~3, N=? (STATUS) 1:FOLLOW IN 2:FOLLOW OUT 3:APPLE MODE
EDIDMODE N	SET/SHOW EDID MODE	EDIDMODE N, N=1~2, N=? (STATUS) 1:ALL 2:APPOINT
EDIDALL N	SET/SHOW EDID ALL SELECTION	EDIDALL N, N=1~7, N=? (STATUS) 1:FHD/2CH 2:FHD/MCH 3:UHD/2CH 4:UHD/MCH 5:UHD+/2CH 6: UHD+/MCH 7:SINK

Command Name	Description	Parameters
EDIDIN N1 N2	SET/SHOW EDID INPUT SELECTION	EDIDIN N1 N2, N1=1~4 (INPUT), N2=1~7, N1=? (STATUS) 1:FHD/2CH 2:FHD/MCH 3:UHD/2CH 4:UHD/MCH 5:UHD+/2CH 6: UHD+/MCH 7:SINK
AUTOSWITCH N	SET/SHOW AUTO SWITCHING MODE	AUTOSWITCH N, N=0~1, N=? (STATUS) 0:OFF 1:ON
ECHO N	SET/SHOW COMSOLE AUTO ECHO MODE	ECHO N, N=0~1,0:OFF,1:ON, N=? (STATUS)
FADEFAULT	SET UNIT TO FACTORY DEFAULT	NONE
VER	SHOW UNIT FIRMWARE VERSION	NONE
REBOOT	SYSTEM REBOOT	NONE
?	SHOW DESCRIPT OF COMMAND	NONE
HELP	SHOW DESCRIPT OF COMMAND	NONE

6.7 Factory Default settings

Factory Default Settings	
OUT	INPUT 1
EDID MODE	ALL Mode
EDID	FHD/2CH
HDCP	Follow Out
AutoSwitch	OFF
ECHO	ON

7. CONNECTION DIAGRAM

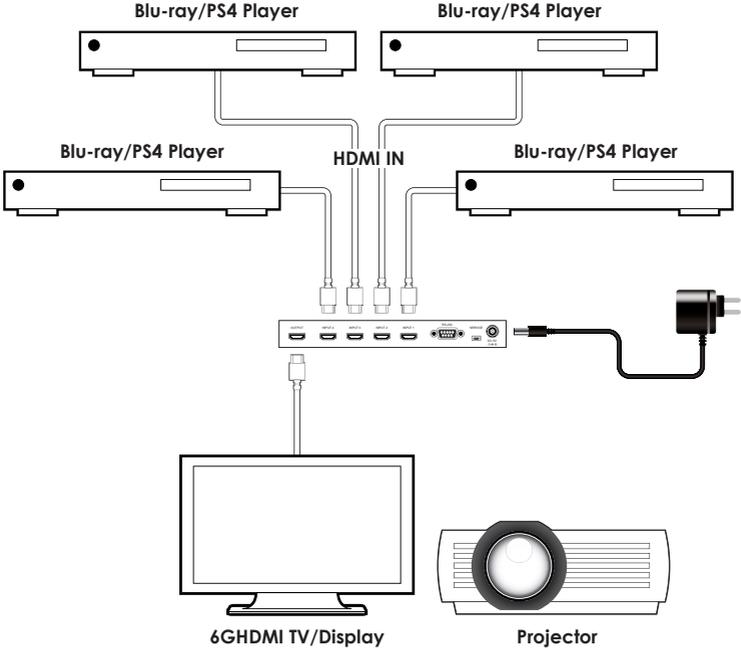

8. SPECIFICATIONS

Input Ports	4 x HDMI 1 x IR 1 x RS232 1 x Mini USB (Service) 1 x RJ45 (Control)
Output Ports	1 x HDMI
Supported Resolutions	VGA~WUXGA 480i~1080p@60Hz 4K@24/25/30/50/60HZ(YUV 4:4:4) 3M(4K@60Hz, YUV 4:4:4 8bit)
HDMI Cable I/O Distance*	5M (4K@60Hz, YUV 4:2:0, 8-bit) 10M (1080p@60Hz, 8-bit)
IR Frequency	30~50kHz
Baud Rate	115200 bps
Power Supply	5VDC/2.6A (US/EU standards, CE/FCC/ UL certified)
ESD Protection	Human Body model: ± 8kV (air-gap discharge) ± 4kV (contact discharge)
Chassis Material	Metal
Silkscreen color	Black
Dimensions	213.5mm × 25mm × 108mm (W×H×D) [All Inclusive]
Weight	608g
Operating Temperature	0°C~40°C/32°F~104°F
Storage temperature	-20°C~60°C/-4°F~140°F
Relative Humidity	20~90% RH (no condensation)
Power Consumption	6.6 W

9. TIMING

DVI AND HDMI SUPPORTED RESOLUTIONS (HZ)	INPUT	OUTPUT
640x480@60/72/75/85	✓	✓
800x600@56/60/72/75/85	✓	✓
1024x768@60/70/75/85	✓	✓
1280x1024@60	✓	✓
1366x768@60	✓	✓
1600x1200@60	✓	✓
1920x1080@60	✓	✓
1920x1200@60	✓	✓
720x576i@50	✓	✓
720x480i@59.94/60	✓	✓
720x480p@59.94/60	✓	✓
720x576p@50	✓	✓
1280x720p@50/59.94/60	✓	✓
1920x1080i@50/59.94/60	✓	✓
1920x1080p@23.97/24/25/29.97/30/50/59.94/60	✓	✓
3840x2160@24/25/30/50/60	✓	✓
4096x2160@24/25/30/50/60	✓	✓
3840x2160@60_420	✓	✓
4096x2160@60_420	✓	✓

NEXIS

SW941