

DESCRIPTION

The DA-1000F-AS is 4-Channel Digital Power Amplifier featuring lightweight, compact and high power output. It delivers 1000W × 4 channels (4Ω output).

It can be mounted on an EIA standard equipment rack (2 unit size).

SPECIFICATIONS


Power Source	100-240 V AC, 50/60 Hz
Amplification System	Class D
Power Consumption	2000W*1
Input	CH 1-4 : 20kΩ (balanced) / 10kΩ (unbalanced), 0.775 / 1.0V / 32dB*2, XLR-F connector
Output	LINK CH 1-4 : XLR-M connector SPEAKER 1-4 : 4 channels : 650Wx4 (8Ω)*3, 1000Wx4 (4Ω)*3 2 channels(BRIDGE) : 2000Wx2 (8Ω)*3 NL4 SPEAKON connector
Frequency Response	20Hz- 20kHz (+/-3dB)
Total Harmonic Distortion	≤0.1%
S/N rate	≥ 100dB
LED Indicator	Protect (red)/ Clip (red)/ -5dB(green) / -10dB(green) / -20dB(green) / Signal(green) / Power(green)
Cooling	Air flow from front to rear
Operating Temperature	0°C~+35°C (32°F to 95°F)
Operating Humidity	80% RH or less (no condensation)
Finish	Case : plated steel sheet, black
Dimensions	483 (W) X 89 (H) X 461 (D) mm
Weight	9.2kg
Accessory	Power Cable ...1

*1 2/3 rated, 8Ω/CH


*2 0dB = 1V

*3 The power is tested under the condition of 20ms burst 1kHz sin wave and 1% THD.


APPEARANCE

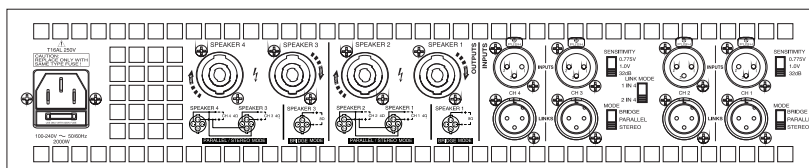

Rear View

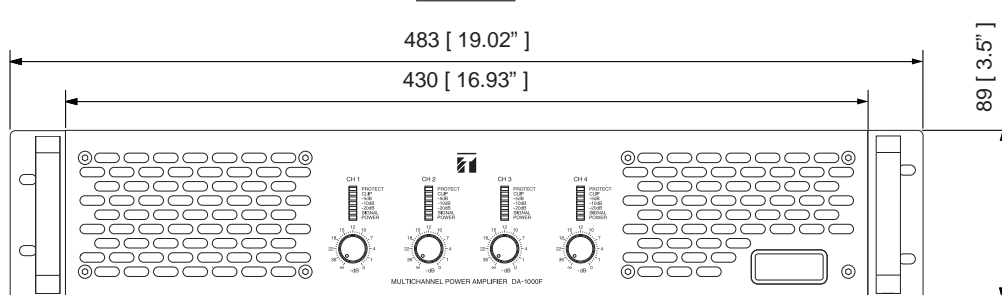

Front View

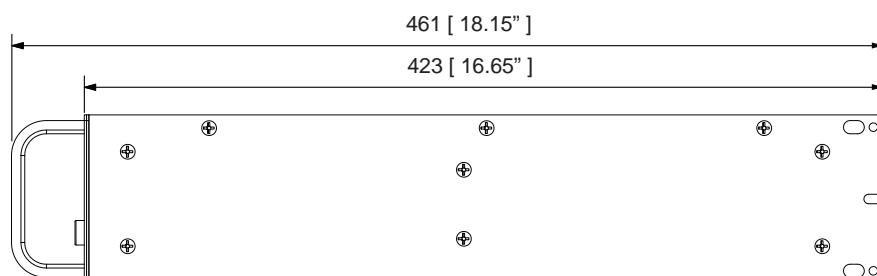

Side View

UNIT:mm SCALE: 1/4