

Specifications

Model	TH-80BF1	TH-65BF1	TH-50BF1
Display panel			
Screen size (diagonal)	80-inch (2032 mm)	65-inch (1638 mm)	50-inch (1257 mm)
Panel type	LCD VA panel/E-LED		
Aspect ratio	16:9		
Effective display area (W x H)	1771 x 996 mm (69.7" x 39.2")	1428 x 803 mm (56.2" x 31.6")	1095 x 616 mm (43.1" x 24.2")
Number of pixels (H x V)	1920 x 1080		
Brightness	350 cd/m ²		
Contrast ratio	5000:1	4000:1	5000:1
Dynamic contrast	50000:1		
Response time	4 ms (G to G)	6.5 ms (G to G)	8 ms (G to G)
Viewing angle (Horizontal/vertical)	176 °/176 ° (CR ≥ 10)	178 °/178 ° (CR ≥ 10)	176 °/176 ° (CR ≥ 10)
Touch panel			
Detection method	Infrared blocking detection method		
Touch operation	Up to 12-point multi-touch (When using Whiteboard Software for Windows. Up to 4-point when using Built-in Whiteboard Software and Whiteboard Software for Mac.)		
Connection terminal			
Video In	BNC x 1		
Audio In (L/R)	Stereo mini jack (M3) x 1 (Shared with COMPONENT/RGB IN)		
HDMI In	HDMI TYPE A connector x 2		
Component video/RGB In	BNC x 1 set		
Audio In (L/R)	Stereo mini jack (M3) x 1 (Shared with VIDEO IN)		
DVI-D In	DVI-D 24-pin x 1		
Audio In (L/R)	Stereo mini jack (M3) x 1 (Shared with PC IN)		
PC In	Mini D-sub 15-pin (female) x 1, Plug & Play (VESA DDC 2B)		
Audio In (L/R)	Stereo mini jack (M3) x 1 (Shared with DVI-D IN)		
Monitor Out (PC Out)	Mini D-sub 15-pin x 1		
USB memory	USB TYPE A connector x 1 (For Memory Viewer)		
PC connection	USB TYPE B connector x 1 (For Touch Panel)		
External speaker	8 Ω, 20 W [10 W + 10 W] (10 % THD)		
Serial	D-sub 9-pin (male) x 1 for external control (RS-232C compliant)		
DIGITAL LINK/LAN	RJ45 x 1 for network and DIGITAL LINK connection, compatible with PLink™, 100BASE-TX		
Function slot	SLOT2.0 x 1 (Vacant)		
Audio			
Built-in speaker	20 W [10 W + 10 W]		
Electrical			
Power requirements	110–127 V AC, 50/60 Hz, 220–240 V AC, 50/60 Hz		
Power consumption	350 W	215 W	140 W
Power off condition	Approx. 0.3 W		
Standby condition	Approx. 0.5 W		
Mechanical			
Dimensions (W x H x D)	1868 x 1093 x 104 mm (73.6" x 43.1" x 4.1")	1517 x 892 x 108 mm (59.8" x 35.2" x 4.3")	1185 x 705 x 104 mm (46.7" x 27.8" x 4.1")
Bezel width	Approx. 43 mm (1.7")		
Weight	81 kg (178.6 lbs)	58 kg (127.9 lbs)	34 kg (75.0 lbs)
Protective glass	Thickness: Approx. 3.3 mm (0.13") / Anti-glare		
Cabinet material/color	Aluminum/Black		
Pitch for wall-hanging	VESA compliant 400 x 400 mm (15.8" x 15.8")	684 x 300 mm (27.0" x 11.9")	400 x 300 mm (15.8" x 11.9")
Installation orientation	Landscape/Portrait (When installing the display on portrait setting, be sure to install with the power indicator at the topside of the display.)		
Installation angle	Up to 20 degrees forward with landscape setting	Up to 45 degrees backward in landscape orientation	Up to 20 degrees forward / up to 45 degrees backward in landscape orientation
Environment			
Operating environment	Temperature: 0 °C to 40 °C (32 °F to 104 °F) [for up to 1400 m altitude] / 0 °C to 35 °C (32 °F to 95 °F) [for between 1400 m and 2800 m altitude], Humidity: 20 % to 80 % (Non-condensation)		
Storage environment	Temperature: -20 °C to 60 °C (-4 °F to 140 °F) Humidity: 20 % to 80 % (Non-condensation)		
Continuous operation	18 hours		
Built-in wireless LAN function			
Standard	2.4 GHz: IEEE802.11b/g/n, 5.0 GHz: IEEE802.11a/n		
Infrastructure mode	WPA2-PSK (TKIP/AES), WPA-PSK (TKIP/AES), WEP (64-bit/128-bit), WPA-EAP/WPA2-EAP (PEAP [MS-CHAPv2/GTC]/EAP-FAST [MS-CHAPv2/GTC]/EAP-TTLS [MD5/MS-CHAPv2], 128-bit/64-bit)		
Included accessories	AC cord, remote control transmitter, batteries for the remote control transmitter (AA size x 2), software CD-ROM (Whiteboard Software/Wireless Manager Software/Operating Instruction) x 1, USB cable x 1, Touch Pen x 4 (TH-80BF1), Touch Pen x 2 (TH-65BF1/50BF1), Eraser x 1, Pen Stand, clamper x 1, screw x 2, washer x 2 (TH-80BF1)		

Optional Accessories

Mobile Stand For 80-inch TY-ST80LF70 For 65-inch TY-ST65PB2 For 50-inch TY-ST50PB2	Wall-Hanging Bracket For 65-inch TY-WK65PR20 For 50-inch TY-WK42PV20 TY-WK42PR20	Pedestal For 80-inch/65-inch TY-ST65P20** For 50-inch TY-ST42P50**	Ceiling Bracket For 50-inch TY-CE42PS20	DIGITAL LINK Switcher ET-YFB200G*2 Digital Interface Box ET-YFB100G	Easy Wireless Stick ET-UW100*3 Early Warning Software ET-SWA100 Series*4
--	---	--	---	--	---

Optional Function Board

DVI-D Terminal Board TY-FB11DD	Dual Link HD-SDI Terminal Board with Audio TY-FB11DHD
-----------------------------------	--

*1 Production discontinued (stock is limited).
 *2 Long Reach Mode on ET-YFB200G is not supported.
 *3 This product can be purchased in the U.S., Canada, Japan, Australia, and New Zealand.
 *4 Part number suffix may differ depending on the license type.

PASS Website – panasonic.net/cns/prodisplays/pass/
 Register your display to activate the upgrade kit and get what you need.

Panasonic

BUSINESS

BF1 Series

Touch Screen LCD Display

80-inch TH-80BF1
 65-inch TH-65BF1
 50-inch TH-50BF1

Your Window on the Future

Interactive Display for Business and Education



For more information about Panasonic professional displays, please visit:
 Global Website – panasonic.net/cns/prodisplays/
 YouTube – www.youtube.com/PanasonicProDisplay

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. Windows, Windows Vista and PowerPoint are trademarks of Microsoft Corporation in the United States and other countries. Android is a registered trademark or trademark of Google Inc. Macintosh, Mac, Mac OS X, iPad, iPhone, iPod touch and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. The PLink trademark is an application trademark in Japan, the United States, and other countries and regions or registered trademarks. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Crestron Connected™ is a trademark of Crestron Electronics, Inc. Wi-Fi™ and Miracast are trademarks or registered trademarks of Wi-Fi Alliance. HDBaseT™ is a trademark of the HDBaseT Alliance. All other trademarks are the property of their respective trademark owners. Images on screen are simulated. Use of this product shall be in compliance with all relevant and applicable copyright protection laws. Data or work entered by the user into the Product's external inputs (including but not limited to motion pictures and photography) shall be the creation of the user (excluding quoting) or shall be authorized for use by the author(s) of the data or work. Panasonic has no right or authority to grant the Product user any license, rights, and titles to use, modify, copy, or distribute, etc., any data or work not created by the user or used with express permission of the data or work's author(s). 36 USC 220506 © 2017 Panasonic Corporation. All rights reserved.

All information included here is valid as of April 2017.

CT17-G01PF-BF1 Printed in Japan.





Connect. Create. Share. A Turnkey Display That Brings Out the Best in People.

Good communication is key in the office or classroom. The Panasonic BF1 Series puts the tools you need to achieve it at your fingertips. Start presenting instantly on the whiteboard, import and modify media wirelessly, brainstorm ideas with teams in remote locations, and email progress direct from the display. Do it all from an intuitive touchscreen with fewer cables and no need for a remote. The BF1 Series doesn't just save time and money: it's a complete end-to-end solution engineered for success at the highest level.



Touch Screen LCD Display
80-inch / 65-inch / 50-inch

BF1 Series



PRACTICAL APPLICATIONS



For Presentations

Switch on. Start work. Make notes, draw, add graphics, display documents, video, and more. Save as image files and email. Couldn't be simpler!



In the Classroom

Precise 12-point multi-touch control and user-friendly menu bar make it easier for students to understand any subject using the display's powerful features.



Video Conferences

The BF1 Series not only lets your teams videoconference*, it allows them to work on documents together in split-screen mode at the same time.

* Additional equipment and subscription required for video- and web-conferencing system.



For Meetings

Media such as websites, documents, and PC desktops can be mirrored wirelessly* from compatible devices on the big screen.

* Drawing on media transmitted via Mirroring Input is not supported.



For Process Management

The BF1 Series has useful application in industry. Staff can manage production processes, scheduling, and share spreadsheet data on-screen.



For Public Information

Connected to appropriate PC software, the BF1 Series excels as an interactive touch-screen display for museums, exhibitions, and more.


USABILITY

Powerful and Intuitive
Quick-Start Whiteboard



On-screen Menu Bar Keeps You In Control

Don't lose the crowd—or your cool—in endless menus while you search for content or functions. With the BF1 Series, everything is to hand in a discreet menu bar at the bottom of the screen that offers instant access to source inputs, whiteboard tools, and other controls you use most frequently. Even when the pressure's on, you'll look like a pro.

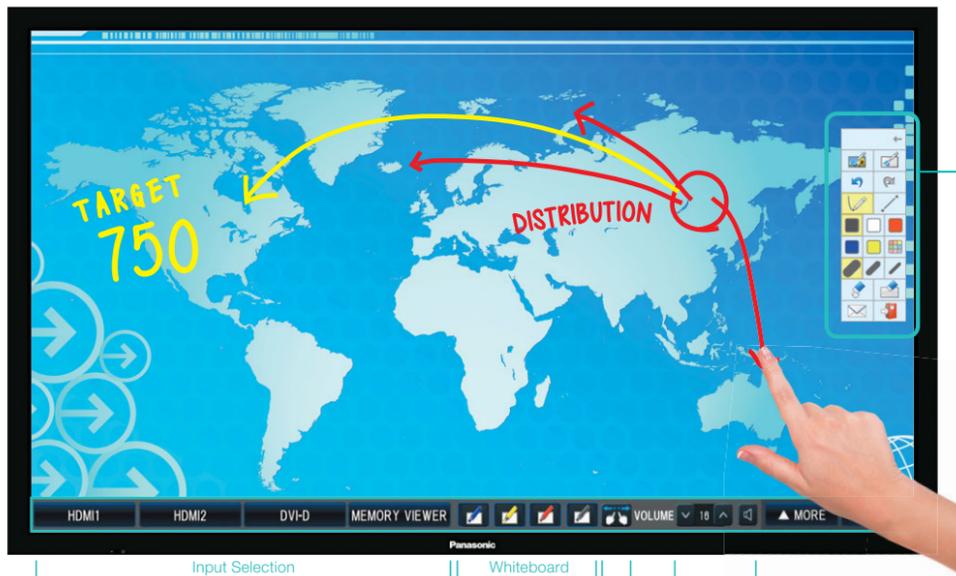

Input Selection: Four frequently used inputs can be registered. Whiteboard: Writing, Touch zoom. Volume settings.

Colors Everyone Can See

Color Universal Design (CUD) ensures that colors are reproduced clearly and accurately for the many millions of people living with color-vision defects. The CUD setting is ON/OFF-selectable (default setting is OFF) according to user preference, and the display's power LED indicator color is also CUD-compliant.

What is Color Universal Design (CUD)?

Due to genetics or other vision disorders, some people can perceive colors differently. Individuals can have difficulty distinguishing between certain color combinations. CUD ensures that color information is accurately expressed for the comfort and convenience of all.



Note: CUD logo denotes product certification by Color Universal Design Organization in Japan.

User-Friendly Menu Bar

Frequently used functions such as input selection, pen tool, enlargement tool, and volume control can be found in the menu bar. Access detailed information or hide it for uninterrupted full-screen display.



Quick-Start Whiteboard

Start working on the built-in whiteboard right away—just switch on the display. Intuitive operation makes life easy for kids and less tech-savvy presenters.



Makes Notes Fast

Use the tool palette to write text and draw freehand on your document. Save it to memory or email it direct from the display. Included stylus pens and eraser let you write large amounts of text just like a regular whiteboard.



Connect a Variety of Devices and Switch Sources Quickly

Up to four of your most frequently used inputs can be named and assigned to the menu bar for quick and easy switching. Smooth operation without a remote controller allows you to focus on making a creative presentation.



Play USB Content Instantly

Playing Full HD video, still images, and digital documents from USB storage devices couldn't be easier. Just insert a thumb drive into the USB port and start presenting without needing to connect a PC. The Memory Viewer app enables image* (JPEG, BMP) and video* (WMV, AVI, MOV, MP4, MPG) selection from handy thumbnail previews.



* In some cases, files may not be viewable even if they are encoded in a supported format.

Easy to Save and Share



Produce up to 100 pages*1 of work on the whiteboard and save them to the built-in memory*2 or USB thumb drive as JPEG image files. You can also copy data stored on internal memory to a USB drive, or send your pages as image files directly from the screen via email*3. Keeping everyone in the loop is simple.

*1 With built-in memory setting to ON. When individual file data size is large, the number of pages that can be saved may decrease. *2 Built-in memory ON/OFF is included. When OFF is selected, only one whiteboard page can be created. *3 Can be sent as JPEG format only.

Write and Draw on Video and Still Images

You can write and draw on almost any media you like, including video and still images from external devices. These dynamic multi-media capabilities make it easy for teams to share information, contribute ideas, and solve problems.

Note: Drawing on media transmitted via Mirroring Input is not supported.

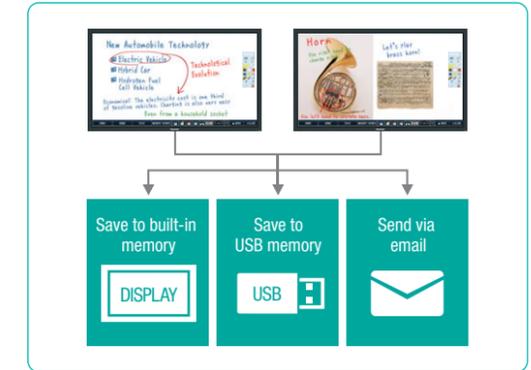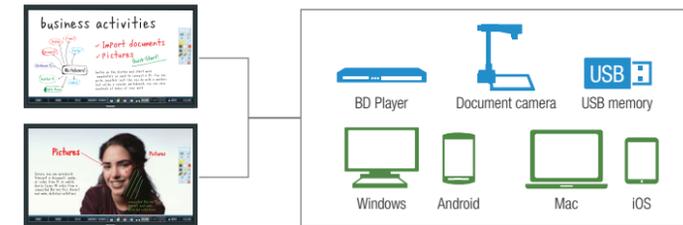


Whiteboard Software for PC Extends Your Capabilities

Whiteboard Software for PC offers deeper functionality for power users. As well as adding extra presentation tools and a PowerPoint® Link mode for easy import and modification of PowerPoint® files, the application's 12-point touch*1 interface lets a group of people write and draw simultaneously.

Whiteboard Software Highlights

- Color Universal Design for clearly distinguishable color reproduction*2
- Three operation modes*2 (Whiteboard Function, PowerPoint® Link Mode, and Desktop Operation)
- More presentation tools*2 (Loupe, Spotlight, Shade, Fade-out Marker)
- Screen video recorder function*2
- Image capture
- Up to 12-point multi-touch function*1
- Image import (JPEG, PNG, BMP)
- Start-up from external memory*2

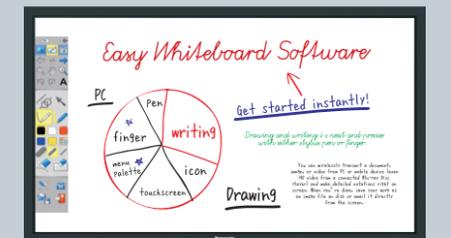

For the latest software, please visit our global website: panasonic.net/cns/prodisplays/

Whiteboard Software Version 5.2 for Windows Supported by Windows® 7, Windows® 8.1, and Windows® 10
Whiteboard Software Version 1.2 for Mac Supported by Mac OS X v10.11.2

Intuitive Operation with Precision 12-point Touch-Sensor*1

Twelve-point multi-touch functionality makes it simple to resize and move graphics around on your documents. Multiple people can also write simultaneously for smooth collaboration.



No Need to Install a PC*2

Whiteboard Software can run from an external USB memory device or SD Card. No need to install software, no cables, and less wasted time.




Image and Video Capture*2

Any displayed image can be screen-capped and saved to memory. The process of writing and drawing can also be recorded as video. You can preserve the presentation as it happens and email it later to absent colleagues, clients, or students.



Modify and Update Meeting Documents*2

Make notes on PowerPoint® documents displayed on screen using your stylus pen and resave them in PowerPoint® format—this makes it easy to keep the whole team up to date, even those not present at the meeting.



Import Image Files

JPEG, PNG, and BMP files can be imported into the display. You can write and draw onto the image files directly.

*1 Up to 12-point for Windows®, up to 4-point for Mac. *2 For Windows® only.


NETWORK

Universal Wireless Support



Panasonic Wireless Solution

Panasonic's Wireless Display function supports secure high-bandwidth wireless transmission from compatible Windows® PCs. Proprietary apps for Windows®, Mac, iOS, and Android™ add a raft of easy-to-use functions, including Multi-Live Mode in split-screen.

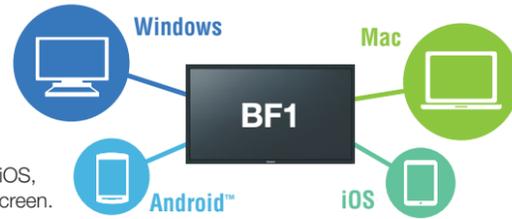

Wireless Display with Wi-Fi-Certified Miracast*1

Share It On the Big Screen

Still images, video, and audio are all smoothly transmitted peer-to-peer from Windows® PCs and Android™ devices. Video content is supported at up to 1080p resolution, with high-bandwidth performance ensuring stutter-free video playback.

Selectable Display Modes

Display modes comprising Duplicate, Extend, and Second Screen allow your source device screen and the display to interact in different ways depending on your needs in the meeting space or classroom.



Windows Android

Duplicate Mode

Mirror your device's screen on the display



Extend Mode

Use the display as an extended PC screen




Second Screen Only

PC screen is shown only on the display




Prevents Improper Connection

A PIN code appears when a user attempts to connect to the display. Only those with access can transmit wirelessly, preventing improper or accidental use.



Smooth Video Playback

The Wireless Display feature is optimized to ensure smooth and uninterrupted playback of online streaming video sources, adding another layer of versatility and convenience.




Selectable Channels

Selectable 2.4 GHz and 5 GHz* channels for areas with Wi-Fi® congestion are included.



* America/Europe/CIS only.

Panasonic Wireless Manager



- Fast and stable wireless connection
- Connect 4 or 16 PCs in Multi-Live Mode

Download free from our global website at panasonic.net/cns/prodisplays/

Quick 3-Step Connection




Multi-Live Mode

Apps for PC, iOS, and Android™ feature Multi-Live Mode. This function enables media display from up to 16 different devices in split-screen configuration (4 or 16 window). You can also transmit content from one PC to up to eight projectors or displays.



Panasonic Wireless Apps



- Dedicated wireless apps for iOS and Android™
- Fewer steps to connect
- Wide media compatibility and functionality

Download free via App Store (iOS) or Google Play (Android™). Search for "wireless projector".

Supported formats
PowerPoint® / Word / Excel / Keynote® / Pages® / Numbers® / Text® / Rich Text® / PDF / JPG** / PNG** / WEB® / Photo® / Camera / Screen Shot



* iOS only.
** Android™ only.
Note: To display Keynote documents in page units, first convert them to PDF.

Easy Wireless Stick ET-UW100**2

- Self-contained Easy Wireless Stick plugs into PC's USB
- Provides internet access while operating wirelessly
- Connect up to 16 PCs in Multi-Live Mode*3


FLEXIBILITY

System Flexibility and Additional Features



Simplified DIGITAL LINK Connection

DIGITAL LINK transmits uncompressed Full HD video, audio, and control commands through a single CAT 5e or higher STP cable for up to 100 m (328 ft). Connect all your source devices to an optional DIGITAL LINK Switcher (ET-YFB200G)/Digital Interface Box (ET-YFB100G) and use just one cable to link your display. This simplifies installation and saves on cabling costs.

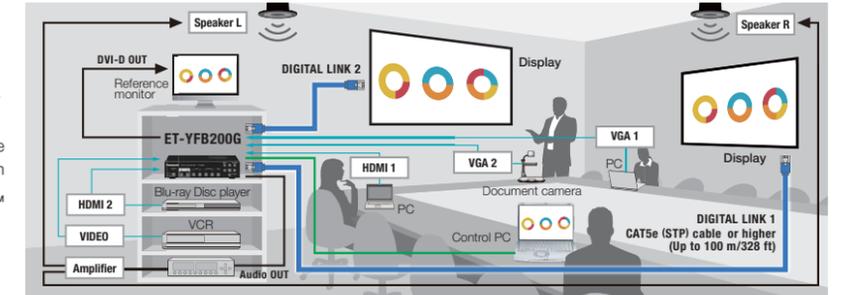

Note: Long Reach Mode on ET-YFB200G is not supported.

For more information, please visit our DIGITAL LINK website: panasonic.net/cns/prodisplays/solutions/technology/digital_link/

Connect a Second Display

Use a VGA cable to mirror content* on a second display or projector—even the notes you might add to documents, images, or video during your presentation. This dual-display capability makes the BF1 series ideal for use in larger venues. Supported inputs include HDMI, DVI, PC, Memory Viewer, and Whiteboard.

* Supports 1080/60p signal only.



Protective Glass and AG Screen Surface for Clear Visibility

Protective glass adds extra security against impact. This insurance is invaluable in high-traffic areas such as conference rooms, classrooms, and public spaces. An improved Anti-Glare (AG) screen treatment scatters reflected light from overhead illumination to reduce glare and improve all-round visibility.



Expandable Connectivity with SLOT2.0

SLOT2.0 allows you to add the connection terminals needed for specific applications. Optional function boards can be inserted to support a customized content distribution system.



Supports Crestron Connected™ Software

LAN terminal is compatible with Crestron Connected™ automation and control software. Monitor and control display devices in your network remotely from a single PC via Ethernet.



Compliance with PJLink™

Compliance with PJLink™ Class 1 enables remote control and monitoring within a wider AV network of PJLink™-compatible components of any brand. Incorporating these displays into an existing system via the local network is seamless and cost effective.



Built-in Speakers

BF1 Series displays feature a pair of built-in 20 W [10 W + 10 W] speakers for clear and powerful audio playback.



Picture-in-Picture Capability

Picture-in-Picture functions offer the versatility to display images from two input sources on the same screen. Documents, videos, and stills can be displayed full-screen with a sub-window showing content from a different source.

Note: Writing and drawing on sub-screen is not available. Miracast and Memory Viewer do not support Picture-in-Picture capability. The following input combinations are not available:

- HDMI, DVI, DIGITAL LINK, Component, and PC
- Whiteboard and Panasonic Application



Picture-in-Picture Mode

Ideal for web conferencing, you can display meeting documents on the main screen and live video footage from a remote location in the sub-window.

Picture-in-Whiteboard Mode

Display media in a window on the whiteboard interface and make notes on the blank space surrounding it.

*1 Drawing on media transmitted via Mirroring Input is not supported. *2 This optional product can be purchased in the U.S., Canada, Japan, Australia, and New Zealand. *3 When using the [Simple], [S-DIRECT], and [M-DIRECT] setting, up to 10 PCs may be connected at the same time in Multi-Live mode.