

## DESCRIPTION

The DA-1250D-AS is 2-Channel Digital Power Amplifier featuring lightweight, compact and high power output. It delivers 1250W × 2 channels (4Ω output).

It can be mounted on an EIA standard equipment rack (2 unit size).

## SPECIFICATIONS

Power Source	100-240 V AC, 50/60 Hz
Amplification System	Class D
Power Consumption	1100W*1
Input	CH 1-2 : 20kΩ (balanced) / 10kΩ (unbalanced), 0.775 / 1.0V / 32dB*2, XLR-F connector
Output	LINK CH 1-2 : XLR-M connector SPEAKER 1-2 : 2 channels : 700Wx2 (8Ω)*3, 1250Wx2 (4Ω)*4 1 channel(BRIDGE) : 2500Wx1 (8Ω)*4 NL4 SPEAKON connector
Frequency Response	20Hz- 20kHz (+/-3dB)
Total Harmonic Distortion	≤ 0.15%
S/N rate	≥ 100dB
LED Indicator	Protect (red)/ Clip (red)/ -5dB(green) / -10dB(green) / -20dB(green) / Signal(green) / Power(green)
Cooling	Air flow from front to rear
Operating Temperature	0°C~+35°C (32°F to 95°F)
Operating Humidity	80% RH or less (no condensation)
Finish	Case : plated steel sheet, black
Dimensions	483 (W) X 89 (H) X 305 (D) mm
Weight	6.1kg
Accessory	Power Cable ...1


\*1 2/3 rated, 8Ω/CH

\*2 0dB = 1V


\*3 The power is tested under the condition of 40ms burst 1kHz sin wave and 1% THD.

\*4 The power is tested under the condition of 20ms burst 1kHz sin wave and 1% THD.


## APPEARANCE

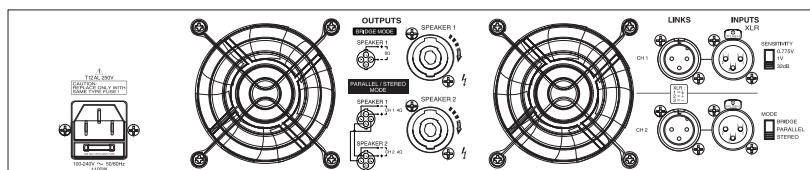

Rear View

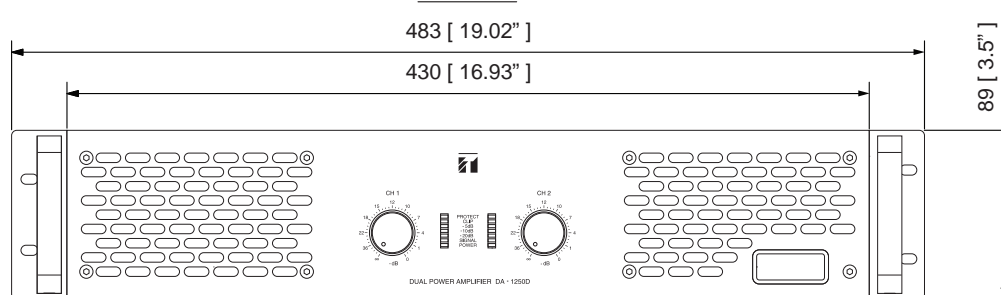

Front View

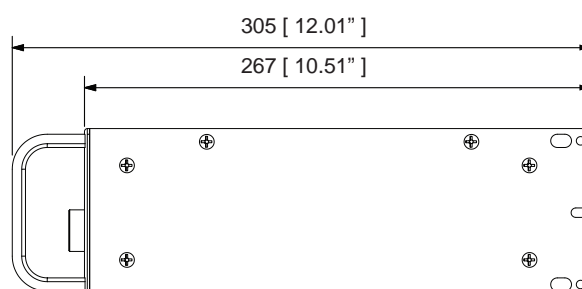

Side View

UNIT:mm SCALE: 1/4