



FCC CE



Benefits

- ▶ 1U 24" LCD console drawer
- ▶ 1920 x 1200 **WUXGA** native resolution / 16.7M colors
- ▶ DVI-D + VGA video input / USB KB / MS
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ One Man installation design
- ▶ Enhanced aesthetics with new molded front panel and 2-point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)

Options

- Front USB hub port for device access
- HDMI 1.3 video input
- 3G / HD / SD-SDI Broadcast-grade input
- Audio input & output
- DC power : 12V / 24V / 48V / 125V
- MAC or SUN Micro keyboard options available

Model (left side open)	Model (right side open)
X124	X124R

Product Specifications

Console Port	
Video input	DVI-D single link
KB / MS	Combo (USB or PS2)
DVI-D console 6ft cable : CX-6	Drawer end : DVI-D + DB-15 (USB KB / MS) Server end : DVI-D + USB type A

LCD Panel	
Panel size (diagonal)	24.1"
Native resolution	1920 x 1200
Brightness (cd/m²)	300
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	14
Dot pitch (mm)	0.27
Display area (mm)	518.4H x 324V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	30,000

Physical		
Product (W x D x H)	Single console	442 x 700 x 44 mm 17.4 x 27.6 x 1.73 inch
	Console w/ KVM	442 x 800 x 44 mm 17.4 x 31.5 x 1.73 inch
Packing (W x D x H)	Single console /	595 x 910 x 140 mm
	Console w/ KVM	23.4 x 35.8 x 5.5 inch
Net weight	Single console	15.3 kg / 33.7 lb
	Console w/ KVM	16.1 kg / 35.4 lb
Gross weight	Single console	19.5 kg / 42.9 lb
	Console w/ KVM	22 kg / 48.4 lb

Mounting Distance	
Single console drawer	660 ~ 890 mm 26 ~ 35 inch
Console w/ KVM drawer	660 ~ 970 mm 26 ~ 38.2 inch

Video Option		
Digital	HDMI	HDMI 1.3 / HDCP 1.1

Audio Option		
Input	Connector	3.5mm stereo jack
	Impedance / Power level	30kΩ / 750mV
Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 40W / Max. 65W
	Power saving mode	Max. 5W / Max. 30W
	Power button on	Max. 1W / Nil

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance	
EMC	FCC & CE certified
Safety	CE / LVD certified
Environment	RoHS2 & REACH compliant

X124 models w/ KVM

For right side open - Add **R** at the end of the model no.
sample : X124-MIP1624**R**

** **IP** console upgrade option for resolution support 1920 x 1080

DVI-D KVM	IP	Remote	12-port
	0	0	X124 - 1201D

DVI-D USB KVM Cable

Resolution Support :
16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200


CI - 6 (6 ft)
CI - 15 (15 ft)

** Resolution related to LCD specification

USB Hub DB-15 KVM	IP	Remote	8-port	16-port
	1	0	X124 - IP802H	X124 - IP1602H
	0	1	X124 - 802H	X124 - 1602H
	0	0	X124 - 801H	X124 - 1601H

Matrix DB-15 KVM	IP	Remote	8-port	16-port
	1	1	X124 - MIP813	X124 - MIP1613
	2	1	X124 - MIP824	X124 - MIP1624
	0	1	X124 - M802	X124 - M1602
	0	2	X124 - M803	X124 - M1603
	0	3	X124 - M804	X124 - M1604

Combo DB-15 KVM	IP	Remote	8-port	16-port
	1	0	X124 - IP802	X124 - IP1602
	0	1	X124 - 802	X124 - 1602
	0	0	X124 - S801	X124 - S1601

DB-15 VGA USB KVM Cable


CB - 6 (6 ft)


CB - 10 (10 ft)

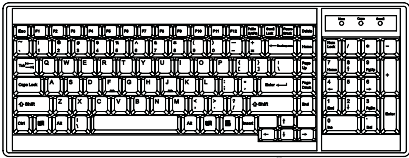


CB - 15 (15 ft)

Resolution Support :
16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

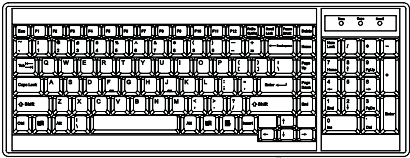
** Resolution related to LCD specification

Standard Keyboard

Ge G keyboard integrated with touchpad

Gb G keyboard integrated with trackball




Supporting layouts

America


United States

EMEA


United Kingdom


Germany


France


Spain


Norway


Italy


Russia


Switzerland


Netherlands


Portugal

Asia


China


Japan


Korea


Arabia


Turkey

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Se S keyboard with touchpad

Mb Mac keyboard with trackball



Sb S keyboard with trackball

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication. All brand names, logo and registered trademarks are properties of their respective owners.

PS-CV-751-X124-Q118V1
Copyright 2018 Austin Hughes Electronics Ltd. All rights reserved.