




This transmitter and receiver set is a great solution for extending uncompressed HD audio and video as well as Ethernet and control via a single run of Cat.5e/6/7 cable over distances of up to 100 meters. Multiple data and control interfaces are provided, including IR, RS-232 and LAN connections. This extender set complies with the advanced HDCP 2.2 and HDMI 2.0 standards, as well as supporting the legacy HDCP 1.x and HDMI 1.x standards. The Transmitter (PD) is powered by 48V PoH (Power over HDBaseT) provided by the Receiver (PSE), allowing for greater flexibility within different installation scenarios.

PANELS



DIAGRAM

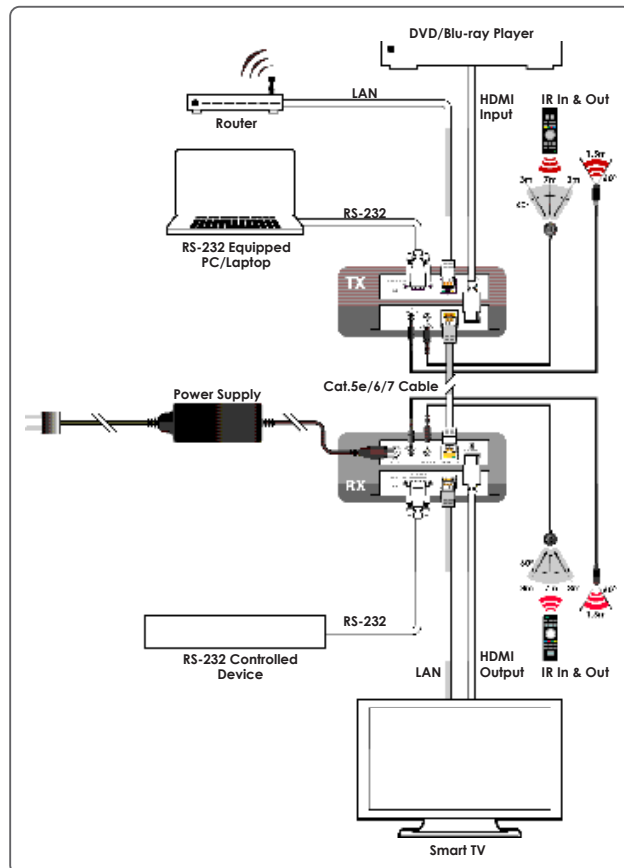

FEATURES

- HDMI with 3D & 4K support, DVI 1.0 compatible
- Supports resolutions up to 4K@50/60Hz (4:2:0, 8-bit)
- Supports CEC bypass
- Simultaneous transmission of uncompressed video, audio and data over a single 100m/328ft Cat.5e/6/7 cable at 1080p60 and 70m/230ft at 4K
- HDBaseT feature support: HD Video and Audio, 100BaseT Ethernet, 48V PoH, and Control (bidirectional IR/RS-232 pass-through)
- Supports standard 48V PoH from Receiver (PSE) to Transmitter (PD) (compatible Transmitters only)

Notes:

- The 48V PoH function is designed to power compatible Transmitter units only. Non-PoH Transmitters will need their own power supply. Other brands of Transmitter may not be compatible.
- The use of "Premium High Speed HDMI" cables is highly recommended for displaying 3D and 4K content and compatible display equipment is required.

SPECIFICATIONS

Interfaces

Input Port	1 x HDMI (Type-A)
Output Port	1 x HDBaseT (RJ-45)
Control I/O	1 x LAN (RJ-45)
Pass-through Port	1 x IR Extender (3.5mm) 1 x IR Blaster (3.5mm) 1 x RS-232(DE-9)

Video

HDMI Compliance	2.0 (DVI 1.0)
HDCP Compliance	2.x
Input Signal Type	4K@60 YUV 4:2:0
Output Signal Type	4K@60 YUV 4:2:0

Resolutions

Maximum Input	HDMI	4096x2160p@60 YUV 4:2:0
Maximum Output	HDBaseT	4096x2160p@60 YUV 4:2:0

Audio

HDMI	LPCM 8 channel Bitstream High-Definition Bitstream
-------------	---

Power

Power Supply	48V/0.83A DC (US/EU standards, CE/FCC/UL certified)
Power Consumption	4.71W

Enclosure

Chassis Material	Metal
Chassis Color	Black
Dimensions (W×H×D)	128mm×25mm×108mm (W×H×D) [Case Only] 128mm×25mm×117mm (W×H×D) [All Inclusive]
Weight	366g

Field Firmware Update

PC Update, WebGUI

ORDERING INFORMATION

Model No.	Product Description
CH-2527TX	UHD HDMI over HDBaseT Transmitter with PoH
CH-2527RX	UHD HDMI over HDBaseT Receiver with PoH