

19" 1-Local/Remote Share Access Cat5 LCD KVM over IP Switch (HT1908 / HT1916 / HT1924 / HT1932)




Date: 2018 / 12
Version: V1.0

Overview



Featuring an integrated LCD monitor, keyboard, and touchpad in a 1U rack-mountable housing, the HT1908 / HT1916 / HT1924 / HT1932 LCD KVM over IP Switch is a control unit that allows secure access to 8/16/24/32 computers from a single KVM console.

The HT1908 / HT1916 / HT1924 / HT1932 features IP-based connectivity that allows local and remote operators to monitor and access the computers. With TCP/IP communications protocol, the HT1908 / HT1916 / HT1924 / HT1932 can be accessed from any computer on the LAN, WAN or Internet.

It's easy to set up the HT1908 / HT1916 / HT1924 / HT1932, just plug the cable into the appropriate port, no software needed, no complicated installation procedures, and no compatibility issues. Connect computers with compact RJ-45 connectors and Cat 5e/6 cable, transmitting distance is up to 100m.

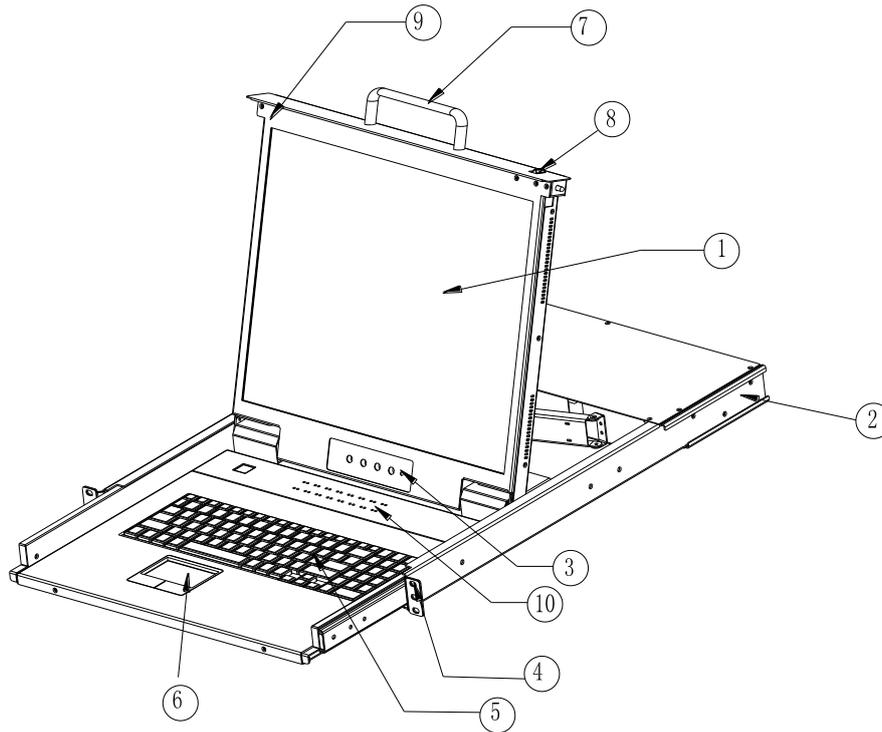

1 LCD Monitor	6 Touchpad
2 Rear Bracket Slot	7 Handle
3 Display Menu Buttons	8 Release Switch
4 Mounting Bracket	9 Display Panel
5 Keyboard	10 Port Selection Buttons

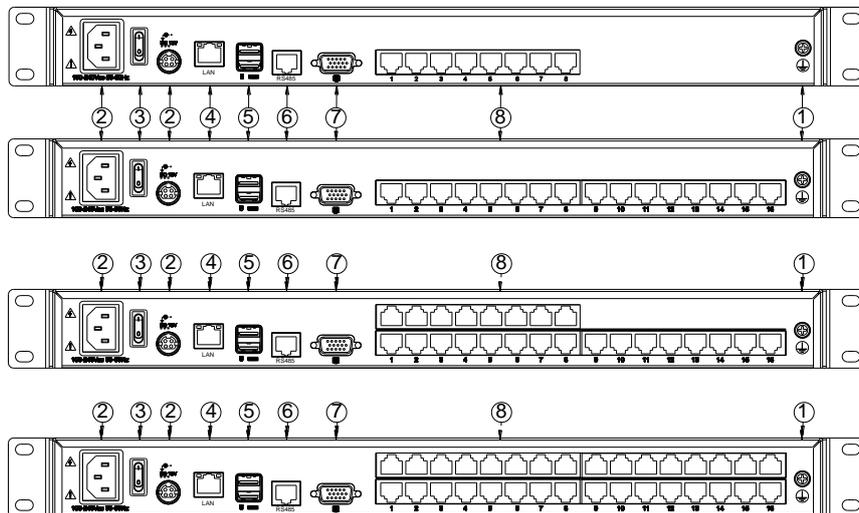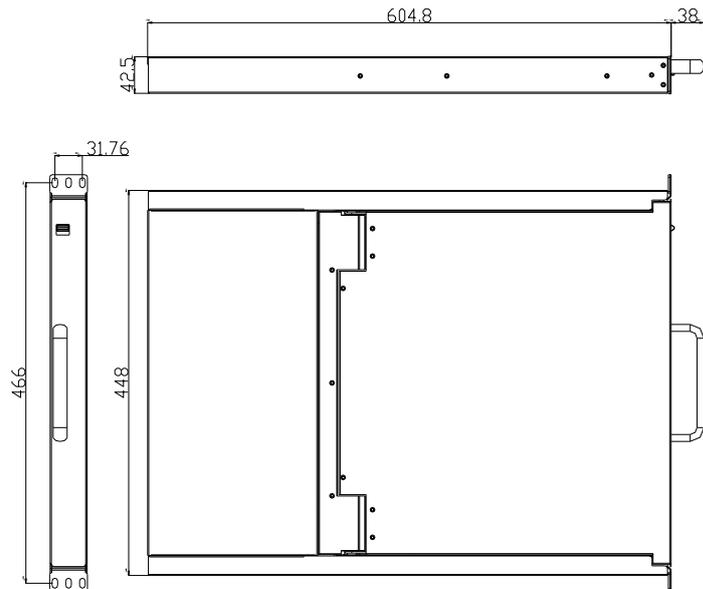

1	Ground Connection Screw	5	USB Port
2	Power input(AC or DC)	6	RS485 Port
3	Power switch	7	Console Monitor Port
4	LAN port	8	Host Port

Features

Hardware Features

- 19" TFT LCD monitor with highlight, high definition and high resolution
- Rack-mountable in 1U system rack
- Full size keyboard with integrated number pad
- Integrated trackball – eliminates the need for a separate, external mouse

Local Console


- Control up to 8/16/24/32 computers
- Support 1 local user and 1 remote user, port share mode allows local and remote users to gain access to a server simultaneously

- Easy-to-use switching by browser-based UI interface, hotkeys and pushbuttons
- Support servers with VGA/DVI/HDMI port
- Multiplatform client support (Windows, Linux, Unix, Mac, Solaris (Sun), Redhat, Ubuntu)
- Local Console, Browser, and AP GUIs offer a unified Multilanguage interface
- Local resolution is up to 1280 x 1024
- Support mouse synchronization mode – automatically synchronizes the local and remote mouse movements
- Video synchronization with local console – EDID information for local console display can be stored in the host module for video resolution optimization
- Keyboard and mouse emulation to ensure the normal booting
- Auto scan feature for monitoring user-selected computer
- Hot pluggable – add or remove computers without having to power down the switch

Remote Console

- Adaptive 10/100/1000 Mbps network
- WEB browser-based remote management
- BIOS-level access
- Video quality and video tolerance can be adjusted to optimize data transfer speed, data transfer speed is up to 30 FPS
- Full screen or scalable video display
- Remote users and local users can control the same server/computer synchronously
- Support AES/DES/3DES encryption
- Support audit function – allows the administrator to audit the device through the system log and operation log
- Exit Macros support
- Configurable user and group permissions for server access and control
- Message Board for communication among remote users
- Support firmware upgrade

Connection Diagram

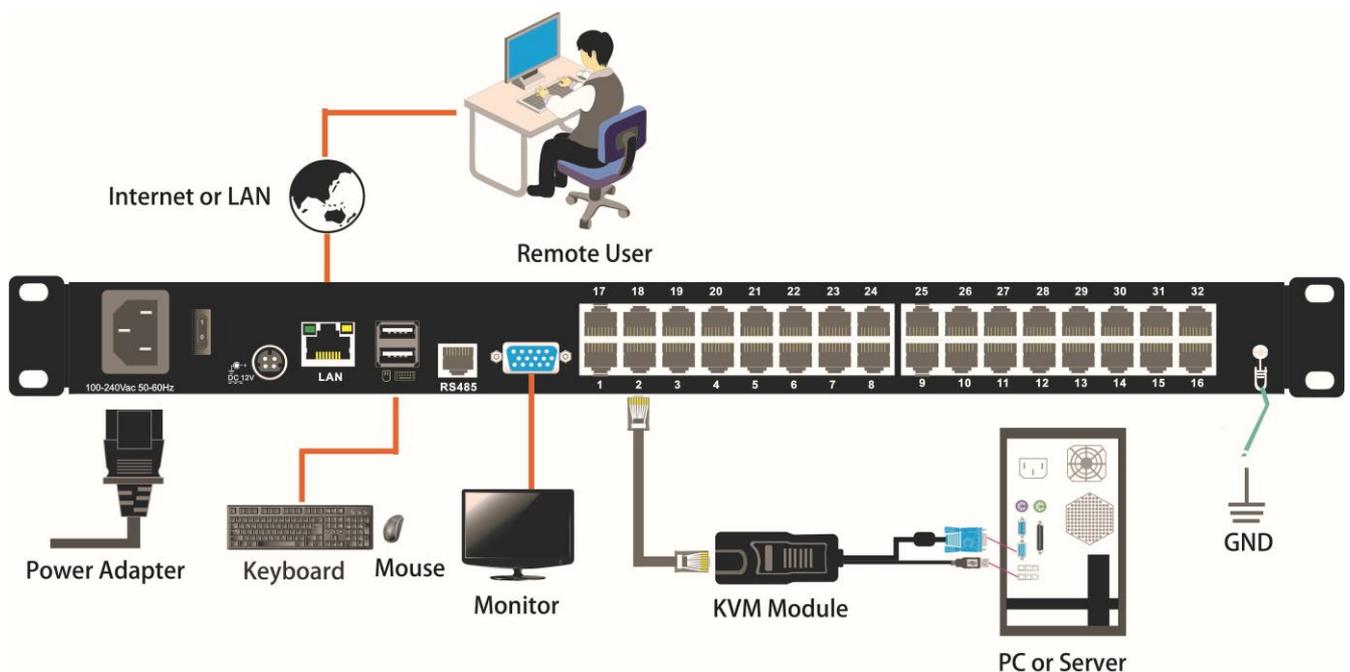

Specifications

Model		HT1908	HT1916	HT1924	HT1932
Computer Connection	Direct	8	16	24	32
	Max	8	16	24	32
Port Selection		Pushbutton, UI interface, Web			
LCD Monitor	Mode	SXGA TFT			
	View Area	19"			
	Optimum Resolution	1280×1024@60Hz			
	Display Color	16.7 M			
	Brightness	250cd/m ² (T y p)			
	Contrast Ratio	1000 : 1 (T y p)			
	Pixel Pitch(mm)	0.294(H) × 0.294(W)			
Mouse	X/Y Resolution	>1000 points /inch, (40 points/mm)			
	Trackball	Supports trackball function			
Keyboard		99 keys (82 keys main keyboard +17 independent number pad)			
Remote	Remote control	KVM control (ActiveX Control)			
	Management Interface	Web			
	Security	DES encryption			
	Optimum Resolution	1920×1080@60Hz			
Input Power		100V – 240Vac, 50 ~ 60Hz, <1.5A			
Power Consumption		23W	24W	29W	29W
Operating Temperature		0 – 40°C			
Storage Temperature		-20 – 60°C			
Humidity		0 – 80% RH, non-condensing			
Net Weight		13.4 kg	13.4kg	13.8kg	13.8kg
Product Dimension(W x D x H)		448mm×605mm×42.5mm			
Package Dimension (W x D x H)		765mm×615mm×185mm			