vivitek

# DX330/DW350
# DH380/DX335ST
# DW355ST/DX331
# DW351/DH381
# DH385ST

Compact and High-value Projectors

## Overview

The D300 series features a high brightness and 30,000:1 contrast ratio to deliver 300” image even in any bright environment. Compact size, low weight, and quick installation make this series ideal for classrooms and meeting rooms. With top-side cover and energy-saving design, this series is easy to replace lamp and has a long lamp life up to 15,000 hours. Furthermore, DX335ST, DW355ST, DH385ST with its short throw design can project up to a 100-inch large and clear image from a short distance to save the space.

## Key feature

### DLP® & BrilliantColor™ Technology

This series supports DLP® and BrilliantColorTM technologies for distinct and vibrant images. The 6-segment (RGBYCW) color wheel not only makes the image more vivid and saturated, but also reproduces color performance.

Without BrilliantColor™ BrilliantColor™

### Bright Images in any Environment

Packed with up to 4,500 lumens of brightness and a high contrast ratio 30,000: 1, the D300 series provides sharp and bight images in any environment with ambient light.

### Potable & Lightweight

Featured under 3kg, these projectors are easy to carry and install between home and school or office.

### Large Image

DX335ST / DW355ST / DH385ST with its short throw design can project up to a 100-inch large and clear image from a short distance to save the space.

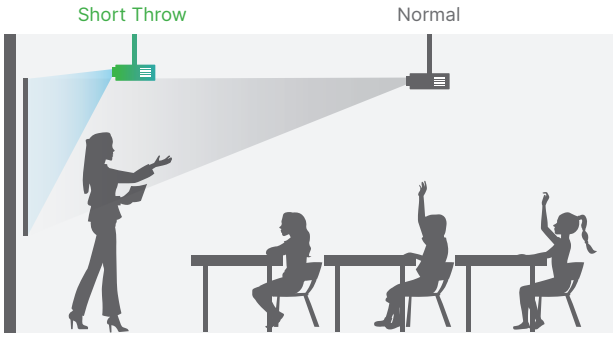


### H/V Keystone & 4 Corner

The DH381 and DH385ST support vertical / horizontal keystone correction and 4-corner geometric adjustment, allowing for virtually unlimited mounting flexibility.

H/V Keystone:±30°

4 Corner

### HDR and HDMI 2.0

This series of HDR compatible projectors (DH381/DH385ST only) is capable of receiving and displaying HDR meta data and can provide a brilliant visual experience with more detail and texture when projected over long distance. With an HDMI 2.0 interface, these projectors also support 4K signals.

SDR

HDR

## Specifications

| Model | DX330 | DW350 | DH380 | DX335ST | DW355ST |
|---|---|---|---|---|---|
| Display Type | DLP Single Chip 0.55" | DLP Single Chip 0.65" | | | |
| Brightness | 4,000 Lumens | | | 3,800 Lumens | |
| Native Resolution | XGA (1024×768) | WXGA (1280 x 800) | 1080P (1920 x 1080) | XGA (1024×768) | WXGA (1280 x 800) |
| Dynamic Contrast Ratio | 30,000: 1 | | | | |
| Light Source | Lamp | | | | |
| Light Source (Normal/Eco/Dynamic Eco) | 5,000 hrs (Normal) / 6,000 hrs (Eco) / 15,000 hrs (Long Eco) | | | | |
| Aspect Ratio | 4:3 | 16:10 | 16:9 | 4:3 | 16:10 |
| Throw Ratio | 1.94~2.16 : 1 | 1.55~1.73 : 1 | 1.48~1.62 : 1 | 0.617 : 1 | 0.521 : 1 |
| Zoom Ratio | 1.1x | | | N/A | |
| Keystone Correction | Vertical: ±40° | | | | |
| Projection Size | 30”~300” | | | 60”~250” | |
| Speaker | 10W | | | | |
| I/O Ports | HDMI v1.4b x1, Composite Video, VGA-In x1, Audio-In (Mini-Jack), Audio-Out (Mini-Jack), RS232, USB 5V/1.5A (and Service) | | | | |
| Dimensions (WxDxH) | 313 x 236 x 120 mm (12.3” x 9.3” x 4.7") | | | | |
| Weight | 2.6 kg (5.7lbs) | | | | |
| Power Supply | AC 100-240V, 50/60Hz | | | | |
| Power Consumption | 240W (Normal Mode), 200W (Eco. Mode), <0.5W (Standby Mode) | | | | |

| Model | DX331 | DW351 | DH381 | DH385ST |
|---|---|---|---|---|
| Display Type | DLP Single Chip 0.55" | DLP Single Chip 0.65" | | |
| Brightness | 4,500 Lumens | | | 4,000 Lumens |
| Native Resolution | XGA (1024×768) | WXGA (1280 x 800) | 1080P (1920 x 1080) | |
| Dynamic Contrast Ratio | 30,000: 1 | | | |
| Light Source | Lamp | | | |
| Light Source (Normal/Eco/Dynamic Eco) | 4,000 hrs (Normal) / 5,000 hrs (Eco) / 15,000 hrs (Long Eco) | | | |
| Aspect Ratio | 4:3 | 16:10 | 16:9 | |
| Throw Ratio | 1.484~1.93 :1 | 1.187~1.544 : 1 | 1.13~1.47 : 1 | 0.496 : 1 |
| Zoom Ratio | 1.1x | | N/A | |
| Keystone Correction | Vertical: ±40° | | Vertical: ±30°, Horizontal ±30° with 4 corner adjustment | |
| Projection Size | 30”~300” | | | 60”~250” |
| Speaker | 10W | | | |
| I/O Ports | HDMI v1.4b x2, Composite Video, VGA-In x1, VGA-Out, Audio-In (Mini-Jack), Audio-Out (Mini-Jack), RS232, USB 5V/1.5A (and Service) | | HDMI v1.4b x1 / v2.0 x1, Composite Video, VGA-In x1, VGA-Out, Audio-In (Mini-Jack), Audio-Out (Mini-Jack), RS232, USB 5V/1.5A (and Service) | |
| Dimensions (WxDxH) | 313 x 236 x 120 mm (12.3” x 9.3” x 4.7") | | | |
| Weight | 2.9kg (5.7lbs) | | | |
| Power Supply | AC 100-240V, 50/60Hz | | | |
| Power Consumption | 295W (Normal Mode), 210W (Eco. Mode), <0.5W (Standby Mode) | | | |

vivitek

Visit www.vivitekcorp.com for more product info

Copyright (c) 2024 Delta Electronics, Inc. All Rights Reserved

A brand of DELTA