



DW770UST
DW771USTi
DH772UST

Ultra Short Throw Projector
with lightweight for Education

Overview

The D77x series is an ultra short throw projector with 4K compatible. The Ultra short throw lens can make up to a 110" large image from a short distance. With 3,500 lumens of brightness, 5,000:1 contrast ratio and up to 1080p resolution ensure clear, stunning and bright projection. The UST projectors support Crestron® RoomView™ for network monitoring and management capabilities. This series is an ideal projector solution for education environments.






Key feature

Large image in small space



The D77x series with its 0.33-0.35 ultra-short throw design can project up to a 110-inch large and clear image from a short distance to save the space.

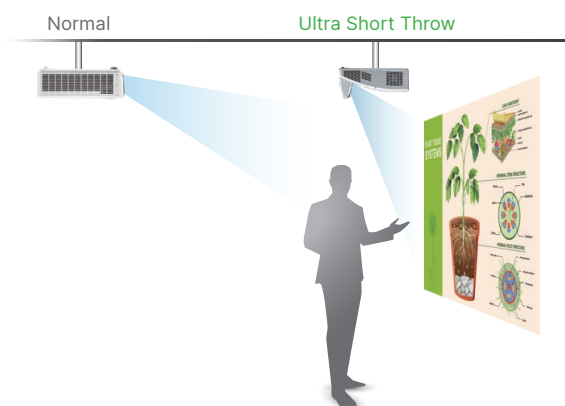

Bright images in any environment



Packed with 3,500 lumens of brightness and a high contrast ratio 5,000: 1, this series provides sharp and bright images in any environment with ambient light.






4K Signal Compatible

The D77x series is a projector capable to accept native 4K signals compatible With built-in HDMI 2.0, supports playback of 4K videos contents and can easily have a detailed and vivid content experience.




Long Lamp Life

With high-efficiency and energy-saving lamp, the projector has a long life span of up to 12,000 hours in Eco mode to reduce lamp replacement times.

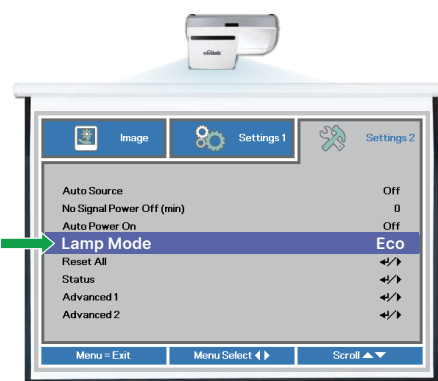


Support Crestron RoomView

The D77x series projectors support Crestron® RoomView™ network monitoring and management control system, which can remotely manage and monitor multiple projectors and set schedules.

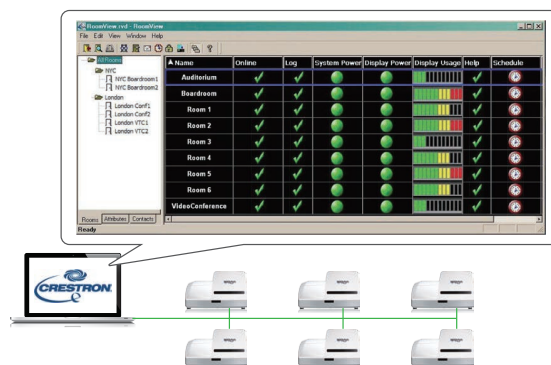


Built-in Interactivity (DW771USTi only)

For interactive collaboration and in-class learning, the DW771USTi comes with built-in interactivity support for multi users thanks to two pens or an optional Finger Touch (DT03) Unit with 10 points.



Standard



DT03

Product Specifications

Model	DW770UST	DW771USTi	DH772UST
Product Image			
Display Type	DLP Single Chip 0.65"		
Brightness	3,500 Lumens		
Native Resolution	WXGA (1280×800)	WXGA (1280×800)	1080P(1920 x 1080)
Dynamic Contrast Ratio	5,000: 1		
Light Source	Lamp		
Light Source Life (Normal/Dynamic Eco)	6,000/12,000 hrs		
Aspect Ratio	16:10	16:10	16:9
Throw Ratio	0.35:1	0.35:1	0.33:1
Zoom Ratio	Fixed		
Keystone Correction	Vertical: ±40°		
Projection Size	80" - 100"	80" - 100"	88" - 110"
Speaker	10W x2		
I/O Ports	HDMI 2.0 x2 / VGA-In (15pin D-Sub) x1 Composite Video x1 / Audio In RCA x1 VGA-Out (15pin D-Sub) x1 / Audio-In (Mini-Jack) x1 RJ45 (LAN) x1 / RS-232 x1		
Dimensions (W x D x H)	287.7 x 374.5 x 126.6mm (11.3" x 14.7" x 4.9")		
Weight	5 kg (11bs)		
Power Supply	AC 100-240V, 50/60Hz		
Power Consumption	290W (Normal Mode), 250W (Eco. Mode), <0.5W (Standby Mode), <2W (LAN Standby Mode)		



Visit www.vivitekc corp.com for more product info
Copyright (c) 2022 Delta Electronics, Inc. All Rights Reserved

A brand of  **DELTA**