



55D35-LL

55" LCD VIDEO WALL

Commercial Use:

Create a Powerful Visual Experience With pixel Perfect Clarity with our Latest Video Wall Solutions. With an Extra Narrow Bezel, azza Video Walls Seamlessly Recreate your Desired Content Across Almost Any Configuration Style.



Highlights:



Language

The program 3 languages to choose from.



Start IP and End IP

Program can check Start IP and End IP.



Remote Simulation

There is a remote simulation function built into the program to control the display.



USB Flash Drive

Support USB flash drive quick software upgrade.



500 Nit

With 500 nits maximum brightness the display panels can deliver amazingly vivid imagery anywhere during daytime and nighttime conditions.



178° Wide Viewing Angle

The 178° ultra-wide viewing angle is ideal to view the performance from various angles as you walk through it.



Ultra-Narrow Bezel

An Ultra-Narrow 0.88mm Bezel-to-Bezel width creates a seamless and more perfect picture.



Round-the-Clock Operation

Can be used as reliable display 24 hours a day, 7 days a week.



4K UHD Splicing

Support 4k UHD splicing, fine and stable picture, create a picture, create a perfect visual feast.



Machine is Light and Thin

Open Cooling Design, the Machine is Light and Thin.



Daisy Chain

A Lan Daisy chain allows you to control and monitor video walls. Also, through UHD daisy chain using HDMI you can easily set up a UHD video wall without the need of Display Port.



Adjust Display Settings

Can adjust the display settings. and adjust R,G,B white balance and darkness balance, print R,G,B offset, and record color temperature data.



Serial Port and Lan Port


Can be connected to control the operation of the display with both Serial Port and Lan Port to choose at least.



Specification :

Display	LCD Size	: 55"
	Backlight Type	: D-LED
	Resolution	: 1920x1080 Pixes
	Brightness	: 500 cd/m ²
	Contrast Ratio	: 500000 : 1 (Dynamic)
	Response Time	: 8 ms
	Pixel Pitch (mm.)	: 0.63 (H) x 0.63 (V)
	Refeshing Frequency	: 60 Hz
	Viewing Angle	: 178° (H) x 178°(V)
	Lift Time	: 50000 hrs (min)
	Color Gamut (NTSC)	: 72%
	View Area (mm.)	: 1209.6(H) x 680.4(V)
	Display Color	: 1.07B (10bit)
	Orientation	: Landscape & Portrait
Electrical	Power Requirements	: AC 100V-240V,50/60 Hz
	Power Consumption	: <200W
	Standby Consumption	: <0.5W
NT68292-K61A Interface	DP1.2 - OUT	: x1
	DP1.2 - IN	: x2
	HDMI 2.0 - IN	: x2
	USB 2.0	: x1
	RS232 RJ45 - OUT	: x1
	RS232 RJ45 - IN	: x1
	DVI OUTPUT	: x1
Structure	IR-IN	: x1
	Product Size	: 1213.4 x121.9x684.3 mm. (W x D x H)
	Package Size	: 1385X 348X858 mm. (W x D x H)
		: (Double Box Packing)
	Housing Meterial	: Sheet Metal
	Housing Color	: Black
	Bezel to Bezel	: 3.5mm.
	Vesa	: 600 x 400mm.

Display Dimensions :

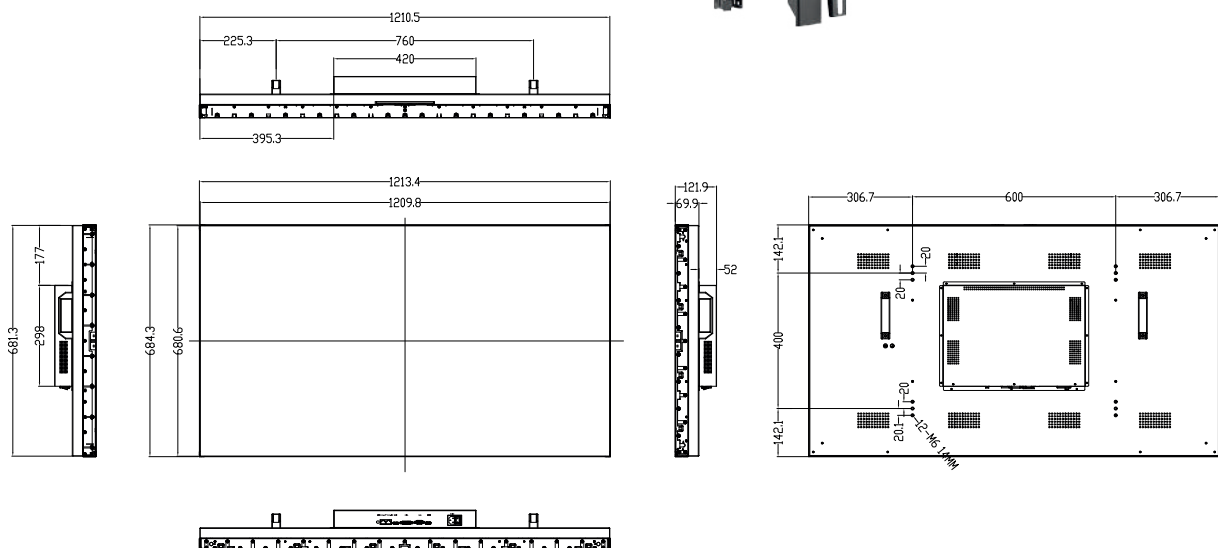

Surface treatment :

Active Screen Size	54.64 inches (1387.80mm) Diagonal
Outline Dimension	1212.2 x 683.0 x 53.7 (Driver C/S)
Pixel Pitch	0.630 (H) x 0.630 (V)
Pixel Format	1920 Horiz. by 1080 Vert. Pixels, RGB Stripe Arrangement
Color Depth	10Bit (D), 1.07 Billion Colors
Luminance, White	500 cd/m ² (Center 1 point,Typ.)
Viewing Angle (CR>10)	Viewing angle Free (R/L 178 (Min.), U/D 178 (Min.)
Power Consumption	Total 149.0w (Typ.) Logic = 7.0w, Backlight=142.0W@EXTVBR-B = 100%)
Weight	13,800g (Typ.)
Display Mode	Transmissive Mode, Normally black
Surface Treatment	Hard Coating(2H), Anti-glare Treatment of the Front Polarizer (Haze 28%)
Possible Display Type	Landscape and Portrait Enabled

Accessories:

- Pop-Out Lock System
- Quick-Release Latch
- Anti-Theft Locking Hole
- Precise Display Alignment
- Pop-Out Extension

Option:

Wall Mount for VideoWall a22a LVW06-48T



Agent :