

# 49D35-LL

## 49" LCD VIDEO WALL

Create a Powerful Visual Experience With Pixel Perfect Clarity With our Latest Video Wall Solutions. With an Extra Narrow Bezel, azza Video Walls Seamlessly Recreate your Desired Content Across Almost Any Configuration Style.

### Highlights :



#### Language

The program 3 languages to choose from.



#### Start IP and End IP

Program can check Start IP and End IP.



#### Remote simulation

There is a remote simulation function built into the program to control the display.



#### USB flash drive

Support USB flash drive quick software upgrade.



#### 500 nit

With 500 nits maximum brightness the display panels can deliver amazingly vivid imagery anywhere during daytime and nighttime conditions.



#### 178° Wide viewing angle

The 178° ultra-wide viewing angle is ideal to view the performance from various angles as you walk through it.



#### Ultra-narrow bezel

An ultra-narrow 0.88mm Bezel-to-Bezel width creates a seamless and more perfect picture.



#### Round-the-clock operation

Can be used as reliable display 24 hours a day, 7 days a week.



#### 4K UHD splicing

Support 4k UHD splicing, fine and stable picture, create a picture, create a perfect visual feast.



#### Machine is light and thin

Open cooling design, the machine is light and thin.



#### Adjust display settings

Can adjust the display settings. and adjust R,G,B white balance and darkness balance, print R,G,B offset, and record color temperature data.



#### Daisy Chain

A Lan daisy chain allows you to control and monitor video walls. Also, through UHD daisy chain using HDMI you can easily set up a UHD video wall without the need of Display Port.



#### Serial Port and Lan Port

Can be connected to control the operation of the display with both Serial Port and Lan Port to choose at least.



## Specification :

<b>Display</b>	LCD Size	: 49"
	Backlight Type	: D-LED
	Resolution	: 1920x1080 Pixes
	Brightness	: 500 cd/m <sup>2</sup>
	Contrast Ratio	: 500000 : 1 (Dynamic)
	Response Time	: 8 ms
	Pixel Pitch (mm.)	: 0.63 (H) x 0.63 (V)
	Refeshing Frequency	: 60 Hz
	Viewing Angle	: 178° (H) x 178°(V)
	Lift Time	: 50000 hrs (min)
	Color Gamut (NTSC)	: 72%
	View Area (mm.)	: 1073.8 (H) x 604 (V)
	Display Color	: 1.07B (10bit)
	Orientation	: Landscape & Portrait
<b>Electrical</b>	Power Supply	: AC 100V-240V, 50/60 Hz
	Power Consumption	: <120W
	Standby Consumption	: <0.5W
<b>Interface</b> MV53-NT68292	DP1.2 - OUT	: x1
	DP1.2 - IN	: x2
	HDMI 2.0 - IN	: x2
	USB2.0 Type-A	: x1
	RS232 RJ45 - OUT	: x1
	RS232 RJ45 - IN	: x1
	LAN RJ45	: x1
	IR 3.5mm (Mini Jack) - IN	: x1

<b>Structure</b>	Product Size (W x D x H)	: 1077.6 x 113.7 x 607.8 mm.
	Package Size (W x D x H)	: 1245 x 348 x 783 mm.
		: (Double Box Packing)
	Housing Material	: Sheet Metal
	Housing Color	: Black
	Bezel to Bezel	: 3.5 mm
	Vesa	: 12-M6 Screw hole 600x400mm

## Accessories :


- 1.5m Power Cord x1
- 1.8m HDMI Cable x1
- 2.0m Network Cable x1
- Angle Bar x1
- Qualified Certificate Lable x1
- Warranty Card x1
- Instruction x1

## Option :

Wall Mount for VideoWall Azza LVW06-48T



## Display Dimensions :

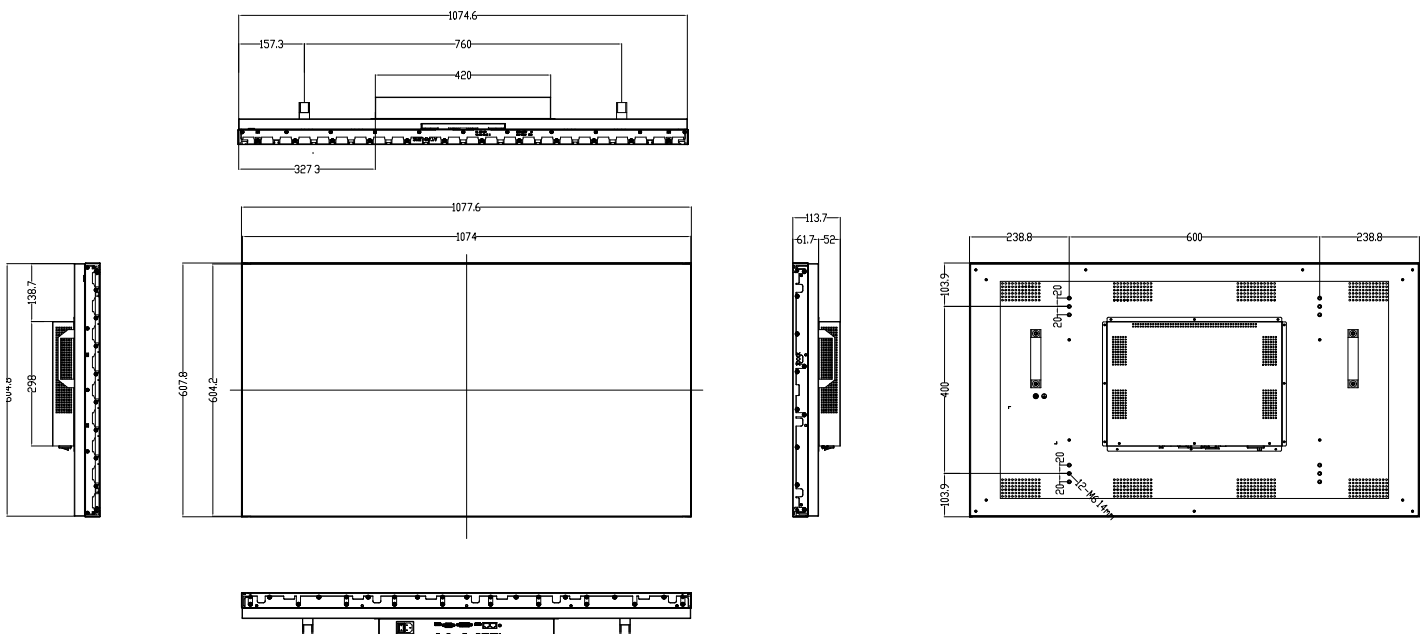

Agent :