



46D35-BL

46" LCD VIDEO WALL

Commercial Use:

Create a powerful visual experience with pixel perfect clarity with our latest video wall solutions. with an extra narrow bezel, azza video walls seamlessly recreate your desired content across almost any configuration style.



Highlights :



Language

The Program 3 Languages to Choose From.



Start IP and End IP

Program Can Check Start IP and End IP.



Remote Simulation

There is a Remote Simulation Function Built into the Program to Control the Display.



USB Flash Drive

Support USB flash Drive Quick Software Upgrade.



500 Nit

With 500 Nits Maximum Brightness the Display Panels Can Deliver Amazingly ViVid imagery Anywhere During Daytime and Nighttime Conditions.



178° Wide Viewing Angle

The 178° Ultra-Wide Viewing Angle is ideal to View the Performance From Various Angles as you Walk Through it.



Ultra-Narrow Bezel

An Ultra-Narrow 0.88mm Bezel-to-Bezel width Creates a Seamless and More Perfect Picture.



Round-The-Clock Operation

Can Be Used as Reliable Display 24 Hours a day, 7 days a Week.



4K UHD Splicing

Support 4k UHD Splicing, fine and Stable Picture, Create a Picture, Create a Perfect Visual Feast.



Machine is Light and Thin

Open Cooling Design, The Machine is Light and Thin.



Daisy Chain

A Lan Daisy Chain Allows you to Control And Monitor Video Walls. Also, Through UHD Daisy Chain Using HDMI you Can Easily Set up a UHD Video Wall Without the Need of Display Port.



Adjust display settings

Can Adjust the Display Settings. and Adjust R,G,B white Balance and Darkness Balance, Print R,G,B offset, and Record Color Temperature Data.



Serial Port and Lan Port

Can be Connected to Control The Operation of the Display With Both Serial Port and Lan Port to Choose at Least.



Display	LCD Size	: 46"
	Backlight Type	: D-LED
	Resolution	: 1920x1080 Pixes
	Brightness	: 500 cd/m ²
	Contrast Ratio	: 500000 : 1 (Dynamic)
	Response Time	: 8 ms
	Pixel Pitch (mm.)	: 0.53025 (H) x 0.53025 (V)
	Refreshing Frequency	: 60 Hz
	Viewing Angle	: 178° (H) x 178°(V)
	Lift Time	: 30,000 hrs (min.)
	Color Gamut (NTSC)	: 72% (typ.)
	View Area (mm.)	: 1018.08(H) x 572.67(V)
	Display Color	: 16.7M (8bit)
Electrical	Power Requirements	: AC 100V~240V, 50/60 Hz
	Power Consumption	: <200W
	Standby Consumption	: <0.5W
NT68292-K61A Interface	DP1.2 - OUT	: x1
	DP1.2 - IN	: x2
	HDMI 2.0 - IN	: x2
	USB 2.0 Type-A	: x1
	RS232-OUT	: x1
	RS232-IN	: x1
	LAN RJ45	: x1
Structure	IR 3.5mm (Mini) - IN	: x1
	Product Size	: 1021.98x125x576.57mm (W x D x H)
	Package Size	: 1145x365x698mm (W x D x H) (Double Box Packing)
	Housing Material	: Sheet Metal
	Housing Color	: Black
	Bezel to Bezel	: 3.6mm.
	Vesa	: 600 x 400mm.

Accessories :


- 1.5m Power Cord x 1
- 1.8m HDMI Cable x 1
- 2.0m Network Cable x 1
- Angle Bar x 1
- Qualified Certificate Lable x 1
- Instruction x 1
- Warranty Card x 1

Option :

Wall Mount for VideoWall AZZA LVW06-48T



Display Dimensions :

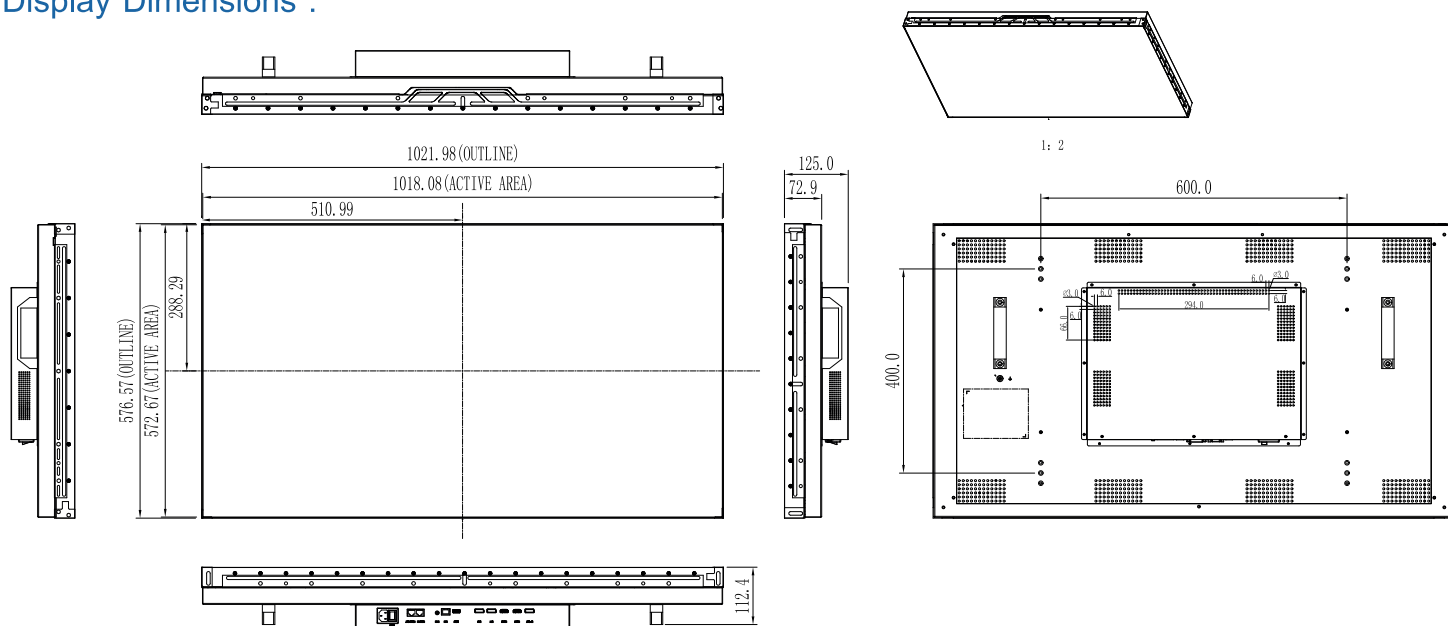

Agent :