

4K HDMI HDBaseT Extender with ExtremeUSB®

VE813A

The VE813A HDMI HDBaseT Extender is an HDMI and USB Extender that supports HDBaseT and patented ExtremeUSB® technology. The VE813A can extend HDMI and USB 2.0 signal up to 100 meters from the HDMI source using a single Ethernet cable. The VE813A supports HDMI features, such as 3D, Deep Color, 4K, CEC, and HDCP. It is equipped with USB connectors that provide touch panel control and file transfer functionality. The extender is also great for syncing files and folders between portable and desktop computers. The superior display capability makes VE813A an ideal solution for medical imaging and digital signage.



Front View




Rear View



Features

- Implements HDBaseT extension technology using only one Cat 5e/6/6a cable that connects the transmitter and receiver
- Anti-jamming – high quality video transmissions via HDBaseT technology that resists signal interference
- Supports Dolby True HD and DTS HD Master Audio
- ExtremeUSB® – supports transparent USB 2.0 signals and true plug-and-play (no software or drivers required)
- USB 2.0 support* – connects devices such as keyboard, mouse, audio, flash drive, printer, touch panel, USB 1.1 web cameras and other USB devices which require moderate amounts of bandwidth
- Built-in 8KV/15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)
- Works with all major operating systems: Windows®, OS X®, and Linux®
- Rack-mountable

***Note:** The VE813A supports a maximum combined USB transfer rate of 40 Mbps for attached USB devices.

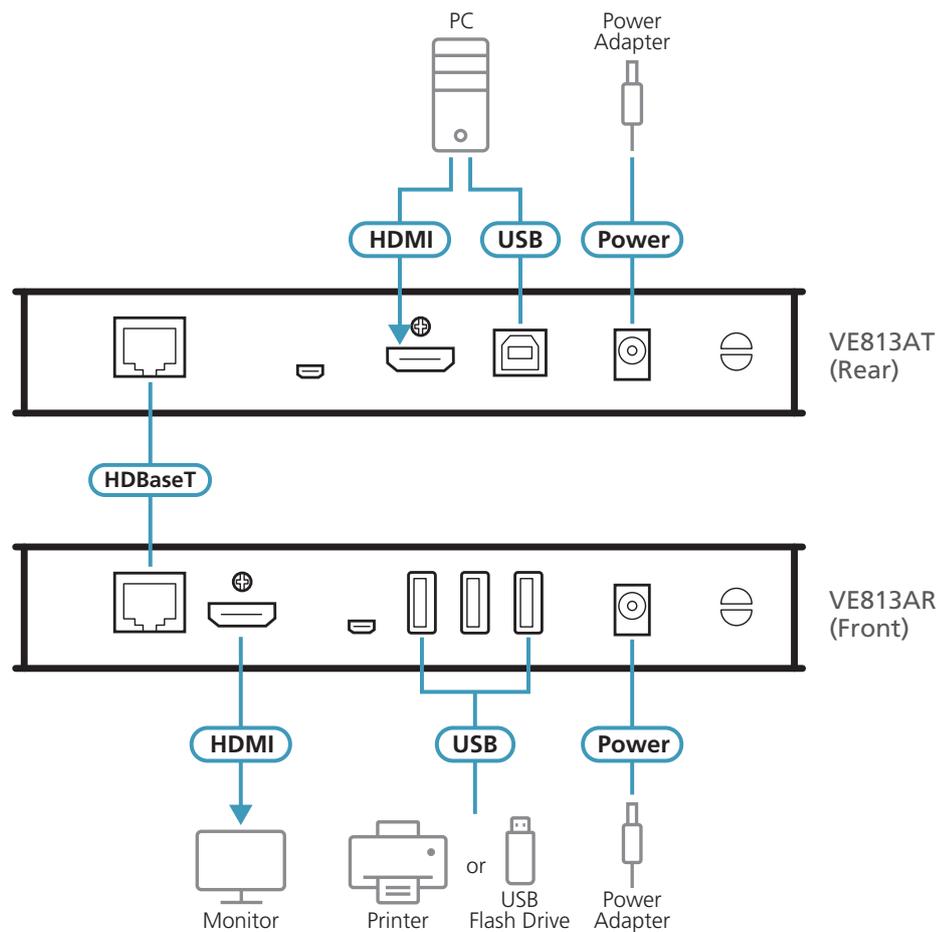

Specifications

	VE813AR	VE813AT
Video Input		
Interfaces	-	1 x HDMI Type A Female (Black)
Impedance	-	100 Ω
Max. Distance	-	3 m
Video Output		
Interfaces	1 x HDMI Type A Female (Black)	-
Impedance	100 Ω	-
Max. Distance	3 m	-
Video		
Max. Data Rate	10.2 Gbps (3.4 Gbps Per Lane)	10.2 Gbps (3.4 Gbps Per Lane)
Max. Pixel Clock	Up to 340 MHz	Up to 340 MHz
Compliance	HDMI (3D, Deep Color, 4K) HDCP Compatible Consumer Electronics Control (CEC)	
Max. Resolutions / Distance	Up to 4K @ 70 m (Cat 5e/6) / 100 m (cat 6a); 1080p @ 100 m *4K supported: 4096 x 2160 / 3840 x 2160 @ 60 Hz (4:2:0) ; 4096 x 2160 / 3840 x 2160 @ 30 Hz (4:4:4)	
Audio		
Input	-	1 x HDMI Type A Female (Black)
Output	1 x HDMI Type A Female (Black)	-
Control		
USB Channel	3 x USB Type-A Female	1 x USB Type-B Female
	Transfer Rate: USB 2.0 (Up to 40 Mbps)	
Connectors		
Power	1 x DC Jack	1 x DC Jack
Power Consumption	DC5V:5.75W	
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-Condensing	
Physical Properties		
Housing	Metal	
Weight	0.62 kg	0.61 kg
Dimensions (L x W x H)	18.20 x 11.61 x 2.87 cm	

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 03/2024 V3.0

© Copyright 2024 ATEN® International Co. Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.
 The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

